

# **SOUND ANCHORS LARGE ADJUSTABLE MONITOR STAND INSTRUCTIONS**



**SOUND ANCHORS INCORPORATED**

**2823 KIRBY CIRCLE NE. unit 110**

**PALM BAY, FLORIDA 32905 USA**

**Phone: (321) 724 1237 Fax: (321) 914 0953**

**[www.soundanchors.com](http://www.soundanchors.com)**


**[info@soundanchors.com](mailto:info@soundanchors.com)**

Thank you for selecting Sound Anchor Large Adjustable monitor stands to support your studio monitors. We hope that you will find the stands to be an indispensable fixture in your recording studio. If you use these instructions as a guide when you assemble your Sound Anchor Large Adjustable Monitor Stands you will find assembly easy.

Please check this inventory list against the drawing on the following page. We chose common fasteners wherever possible, most can be easily obtained from your local hardware store. The part list below has complete fastener specifications. If you find that there is anything missing please email or call us and we will do our best to get the parts that you need out to you.

### INVENTORY LIST

ITEM NO.	PART DESCRIPTION	QTY.
1	FOOT	2
2	TOP WELDMENT	1
3	UPRIGHT WELDMENT	2
4	BOTTOM WELDMENT	1
5	SUPPORT BAR	4
6	3/8-16 x 1/2 SOCKET HEAD CAP SCREW	8
7	7/16-14 x 3 1/2 SOCKET HEAD CAP SCREW	4
8	7/16-14 x 2 1/2 SOCKET HEAD CAP SCREW	4
9	5/16-18x 3/4 SOCKET HEAD CAP SCREW	8
10	5/16-18 x 1/2 SOCKET HEAD CAP SCREW	4
11	7/16 SAE FLAT WASHER	8
12	7/16-14 x 3/4HEX HEAD CAP SCREW	8
13	3/8-16 HEX JAM NUT	8
14	7/16-14 HEX JAM NUT	4
15	3/8-16 SPIKE	8
16	3/8 ID SAE. FLATWASHER	8
17	7/16 ID. HARDENED BLACK WASHER	8
18	BLACK END CAP 1 1/2 x 3	8
19	BLACK END CAP 2 x 2	8
20	BLUEDOTS	8
21	3/8 HEX KEY	1
22	1/4 HEX KEY	1
23	3/16 HEX KEY	1

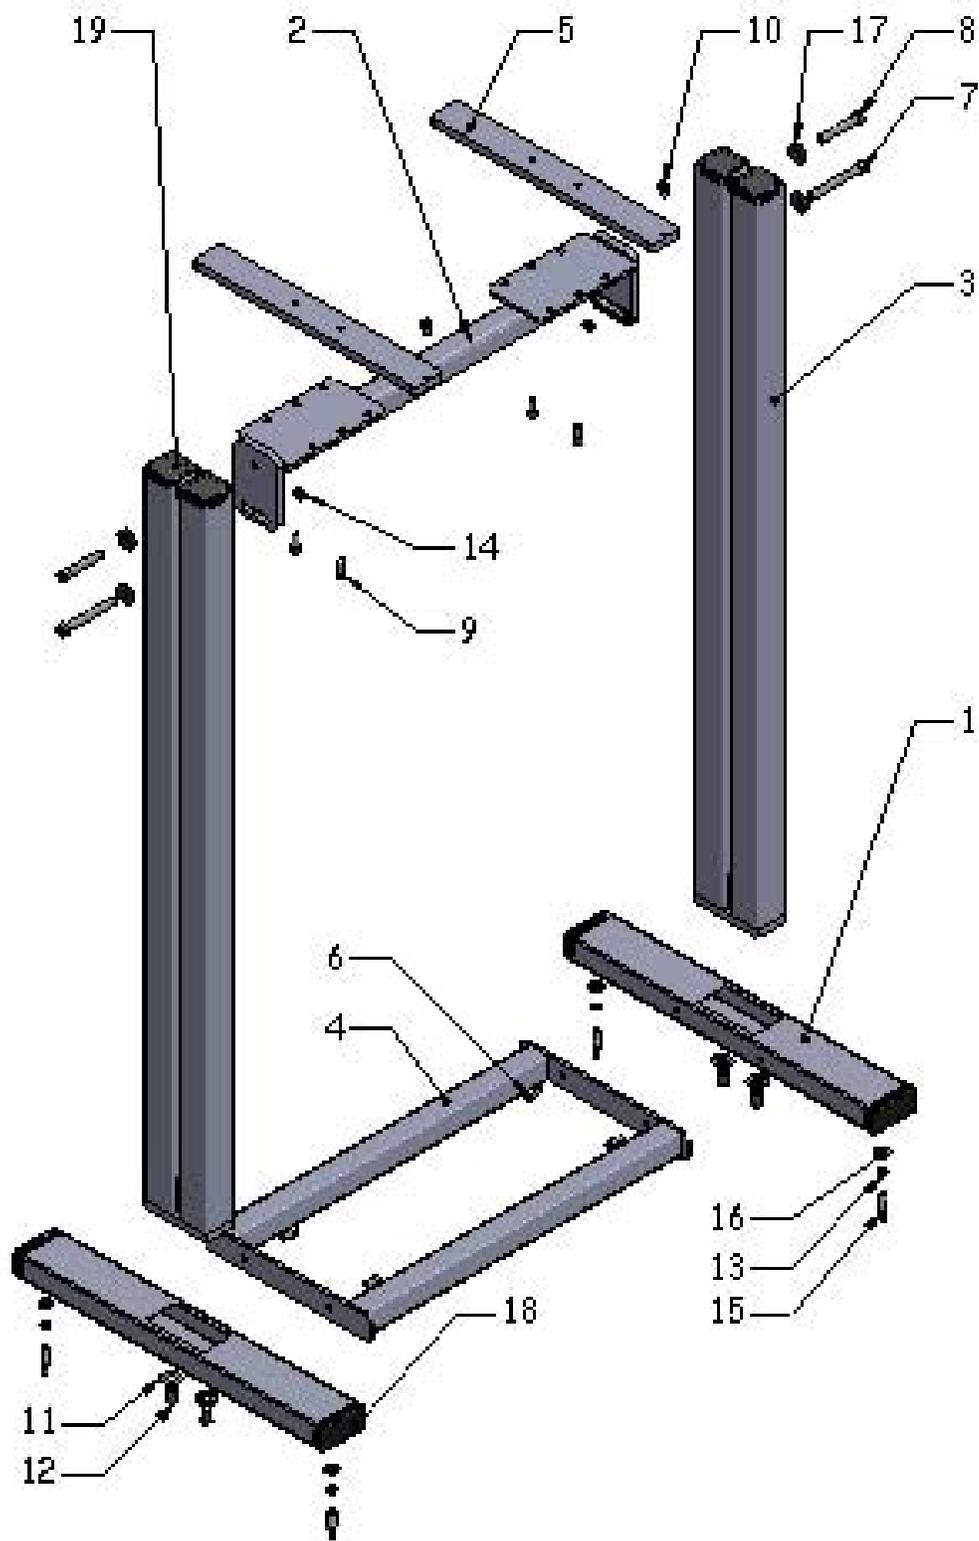

### Assembling your uprights


1. Insert the end of one of the uprights into the rectangular opening in the top of the foot.
2. Use 2 each 7/16-14 hex head cap screws with washers to fasten the upright to the foot.
3. Tighten the cap screws with a 5/8 inch wrench .
4. Repeat this operation until all of your uprights are assembled.

### Assembling your speaker support

1. Insert 1 each 5/16-18 x 1/2 socket head cap screw into the end of each speaker support bar.
2. Attach 2 support bars to each top weldment using 5/16-18 x 3/4 socket head cap screws. Take care that the socket head cap screws that you inserted in step one are both facing upward.
3. Depending on the width of your speakers we may have provided you with more than one set of mounting holes for your speaker support bars. The holes that you choose are your option. The holes that you choose will depend on your setup.

### Putting it all together.

1. Fasten the bottom weldment to the upright assembly using 3/8-16 x 1/2 socket head cap screws.
2. Mount the speaker support assembly to the upright by inserting a 7/16-14 x 2 1/2 socket head cap screw and hardened washer through the slot in the one of the upright sand into the threaded hole in the end of the speaker support assembly. Choose a spot near the top of the stand.
3. Lay the stand down on its side with the side with the speaker support assembly toward the floor.
4. Fasten the other end of the speaker support assembly to the other upright by inserting a 7/16-14 socket head cap screw and hardened washer through the slot in the upright into the threaded hole in the and of the speaker support assembly. Snug up this bolt.
5. Install spikes 3/8" washers and 3/8-16 Jam nuts as shown in fig. 1 if using the optional short black spikes and conecoasters see fig.2

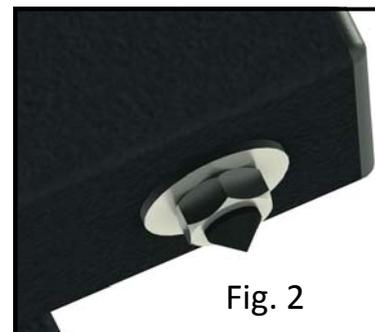

## **IMPORTANT!!!! HIGHLY RECOMEMDED**

### **MAKE CERTAIN THAT ALL SPIKES AND SCREWS ARE INSTALLED BEFORE FILLING BECAUSE THE FILLER WILL ESCAPE IF THEY ARE NOT**

If you are going to be filling your stands this is the time to do it. You may use any loose material to fill your stands (sand, pea gravel or kitty litter are commonly used). We like and have been getting the best results using medium grit silica or general purpose construction sand . This sand is available at some larger or hardware stores and most home improvement stores (Lowe's , Home Depot ect.).

1. Place the stand in a position close to a where it will be used.
2. After you have determined the final position for your stands you will need to level the system using in the spikes at the floor. When everything is adjusted properly you must lock down the jam nuts.
3. Repeat steps one through 10 on your second stand.
4. Place four Bluedots on each of your stand platforms. You may now place your speakers on your stands.
5. You may adjust the height and angle of your speakers anytime by carefully loosening the 7/16-14 socket screw and sliding the platform up or down in the stand. When doing this make certain that you do not loosen the platform too much.

